

## Verbatim LED Track Light 35W 3000K 3500lm 45D White

- Energy efficient LED Track Light
- Universal track adaptor (GLOBAL GA69)
- 180°/350° tilting angle
- Light output of 3500lm
- 40.000 hours lifetime
- 3000K warm white light

**Product Number** 52472

**General Data**

Installation Type	track-mounted
Housing material	Aluminium
Housing colour	White
Protection class	IP20
Dimmable	no

**Geometric Data**

Length (mm)	114.5
Height (mm)	220.5
Width (mm)	158
Weight (g)	1360

**Electric Data**

Wattage (W)	35
Voltage (V)	220-240
Current (mA)	152
Power Factor	>0.9
Operating Frequency (Hz)	50/60
Safety Class	I
Power supply	Integrated

**Photometric Data**

Luminous Flux (lm)	3500
CRI	80
CCT (K)	3000
Luminous Efficacy (lm/W)	100
Luminous Intensity (cd)	7700
Beam Angle (°)	45
Tilting Angle (°)	180°/350°

**Lifespan**

Lifetime (hrs)	40,000
Switching Cycle	100,000


**Mechanical Parameters**

Glow wire test	750°C
----------------	-------



04/07/2017

### Energy Rating



This luminaire contains built-in LED lamps.

**A++**

**A+**

**A**


**B**

**C**

**D**

**E**

} **LED**



The lamps cannot be changed in the luminaire.



**Verbatim** 52472

**874/2012**

### Technical Packaging Details

<b>Barcode</b>	023942524724
<b>EAN 128</b>	(02)00023942524724(37)01(91)147
<b>EAN 14</b>	50023942524729
<b>Pack Weight</b>	1450 (g)
<b>MOQ</b>	1
<b>Carton Dimensions (HxWxL)</b>	155x205x225 (mm)
<b>Cartons/Pallet</b>	84
<b>Layers/Pallet</b>	6
<b>Units/Pallet</b>	84

### Photometric Diagrams

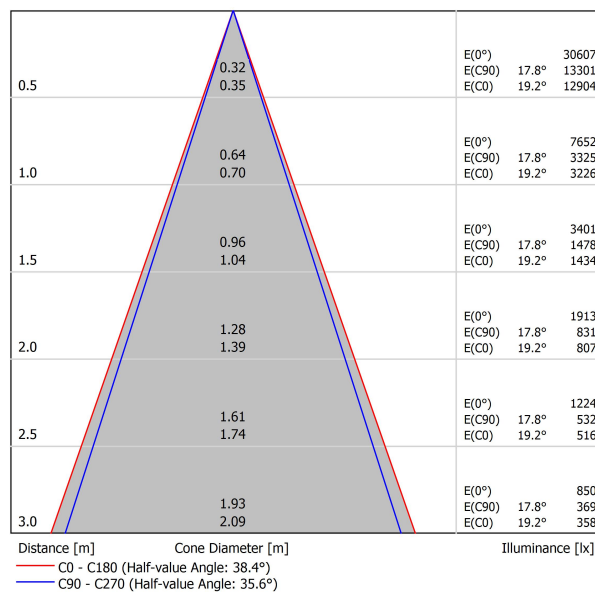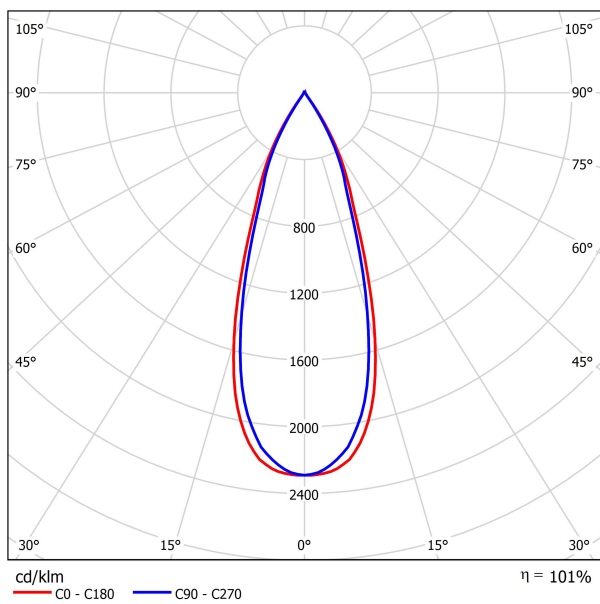

04/07/2017